

GENERAL
FEATURES

Tracker type	Independent-row single-axis 1P tracker
Tracker length	Up to 260m (853') length; coherent string conform tables
Array height	Height rotation axis from 1.30m to 1.90m (4'3" to 6'3")
Foundation	Sigma shaped steel posts (rammed, pre-drilled, concrete)
Tracking range	±60°
Slope tolerances	36% N-S; 36% E-W without grading
Allowable windspeed	Up to 75m/s; 3-s gust at 10m (270km/h; 168mph)
Stow position	Flat stow
Ground cover ratio (GCR)	Standard from 31% to 53%
Module attachment	Screw, Lockbolt or Clip
Motor type	DC and AC available
Drive units per MWp	Configurable to less than 7
Solar tracking method	Astronomical algorithm
Grounding system	Self-grounded hardware available
Sensors	Wind speed, wind direction (snow and flood sensor if needed)
Control and communication	BUS wired, ZigBee or Lora wireless communication available
Nighttime stow	Individually customizable
Backtracking	3D adaptive backtracking
Services	Onsite training and commissioning
Aeroelastic wind tunnel test	Advanced aeroelastic test with CPP Wind Engineering
Certifications	UL 3703 / UL 2703 / IEC 62817
Warranty	Structural components: 15 years Electronical components: 5 years



NEXT GENERATION SOLAR TRACKERS

HORIZON
L:TEC® 1P



GENERAL SUPPORT
support@ideematec.com

GERMANY / HEADQUARTERS
germany@ideematec.com

USA
usa@ideematec.com

SPAIN/ PORTUGAL
iberia@ideematec.com

FRANCE
france@ideematec.com

SOUTH AFRICA
southafrica@ideematec.com

AUSTRALIA
australia@ideematec.com

CHINA
china@ideematec.com

MENA
mena@ideematec.com

COLOMBIA
colombia@ideematec.com

BRAZIL
brazil@ideematec.com

CHILE
chile@ideematec.com

MEXICO
mexico@ideematec.com

www.ideematec.com



Most advanced one-in-portrait tracker solution

The L:TEC®'s patented decoupled and locking drive technology has made it possible to deploy XXL modules and longer string lengths without compromising the stability of the trackers. In addition, the low inclination stow offers the best module protection available whilst the lifetime stress on the tracker and modules is significantly decreased.

MULTI LOCKING TECHNOLOGY ensures that the tracker is mechanically self-locked, minimizing loads on the drive unit. This locked structure is as stable as a fixed tilt.



MAXIMUM DESIGN FLEXIBILITY UNLIKE ANY OTHER TRACKER

- Suits all modules types:
72 Cells, 78 Cells, 66 Cells, bifacial
- BOS-optimized layout
- Modular tracker configuration





UP TO **260** MODULES PER TRACKER WITH ONE DRIVE UNIT

UP TO 260 M TRACKER UNIT


1 String per Table and up to 8 Strings per tracker unit

UP TO 8 M PILE DISTANCE

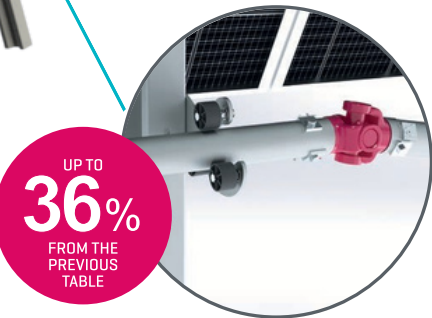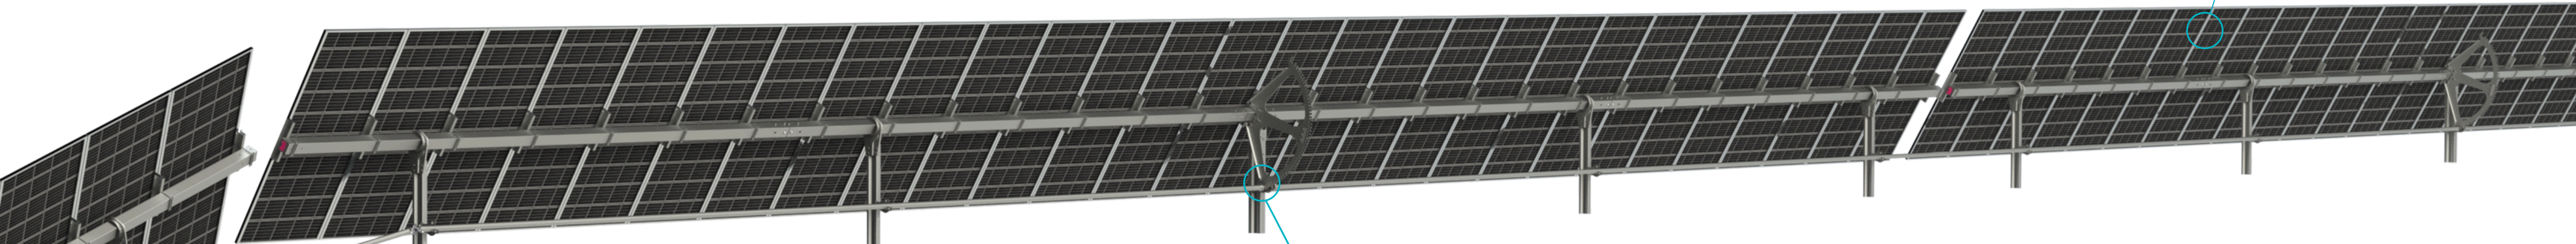

CARDAN JOINTS ADAPT TO ANY TERRAIN

- Each table can be installed at an angle of up to 36 % from the previous table
- Reduced need for complex grading works



FLAT STOW POSITION 360° WIND PROTECTION


- Unique protection against extreme weather conditions
- Up to 50 % less stress with flat stow
- Withstands winds of up to 75m/s 3-s gust
- Higher energy yield during stowing
- Less module stress than other stow strategies

LOCKING AND DECOUPLED DRIVE TECHNOLOGY

- The decoupled drive technology is more efficient than all traditional drives. The smart drive technology transfers the table loads directly into foundations and ensures that forces on the drive are kept to an absolute minimum.
- **This is why we can build the longest and most flexible trackers on the market.**



97%
REDUCED LOADS
ON DRIVE TUBE




BEST LIFETIME VALUE AND OPTIMIZED LCOE

- Highest additional gains
- Optimizes overall yields
- Improves system lifetime
- AC/DC options available

7 MOTORS & CONTROLLERS PER MW

POWERED BY JUST 1 DRIVE UNIT

- 3 times less drive units than competitors
- Higher availability
- Lower maintenance costs



ADVANCED TERRAIN ADAPTABILITY

UP TO **8** STRINGS PER TRACKER AND MAXIMUM FLEXIBILITY WITH SHORT TABLES

- ADAPTIVE CARDAN JOINTS
 - Saving costs & time
 - Reduce need for grading works
- ONLY 1 DRIVE UNIT/MOTOR Same operating costs on any terrain
- SPROCKET

